




# ART7

AsteraBox™

The AsteraBox™ is the interface between lights and controller. We added a CRMX transmitter to the AsteraBox™. Just plug it to your DMX console and control your X-series light (AX7 etc) and other lights with CRMX technology.

The ART7 can transmit up to 512 DMX channels with the most stable wireless DMX available. Of course the new AsteraBox™ still works as an interface between AsteraApp™ and our lights. It's built in battery enables easy and time-saving setup, just like all our products.

## Connections

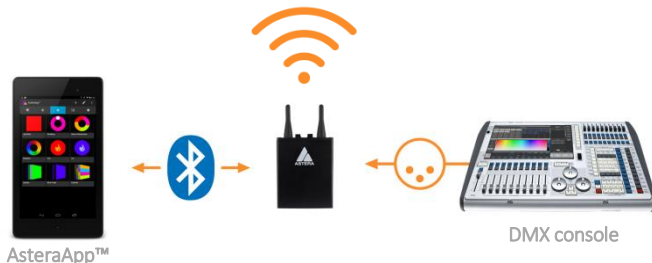

## In a box

- AsteraBox™
- Micro USB cable
- USB Adapter
- DMX Adapter Cable
- Carrying case
- Quick Start Guide



## Accessories (included)



Micro USB cable  
Standard



Carrying Case  
ART7-CSE






DMX Adapter  
ART7-ADP

# ART7

AsteraBox™

Battery:	LG Chem Battery
Runtime:	72hrs (App usage) 16h (CRMX usage)
Nominal Voltage:	3.7v
Charger Output:	5V DC-1A
Charging Time:	8hrs(from AC or high power USB port)
Wireless Frequency:	865 - 870MHz sender/receiver (EU) 902-928MHz sender/receiver (USA) 2.4GHz LumenRadio CRMX module Bluetooth module 4.0
Range: RF,	300m RF range 500m CRMX range 10m Bluetooth range
Operational Temp:	0°C - 40°C
Inactive Temp:	-20°C - 60°C
Unit Size:	L144mm x W78mm x H30mm L5.7" x W3.0" x H1.2"
Weight:	0.230kg 0.5lb
Housing:	Aluminum
Environment:	Indoor / Dry Outdoor
Humidity:	≤90%
Ports:	Micro-USB for charging 3.5" jack for DMX input

## Technical drawing

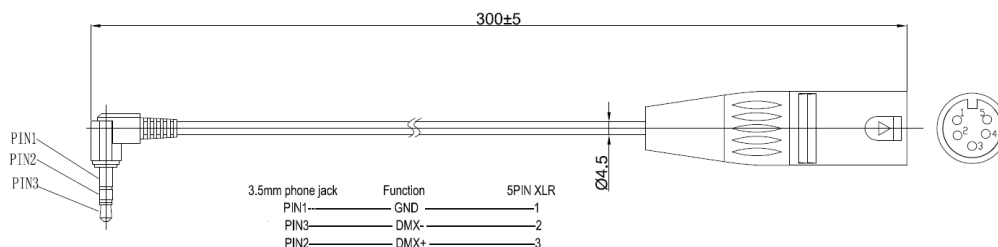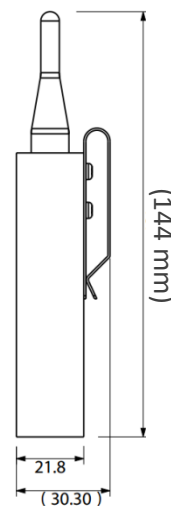

## Compatible devices



AX1



AX3



AX5



AX7



AX10